


® SUPERJET

PNEUMATIC VERSION

The pneumatic SUPERJET[®] is designed for blowing or floating telecommunication and data transmission cables (mainly optical fibre, but also small coaxial and multipair cables) in preinstalled ducts

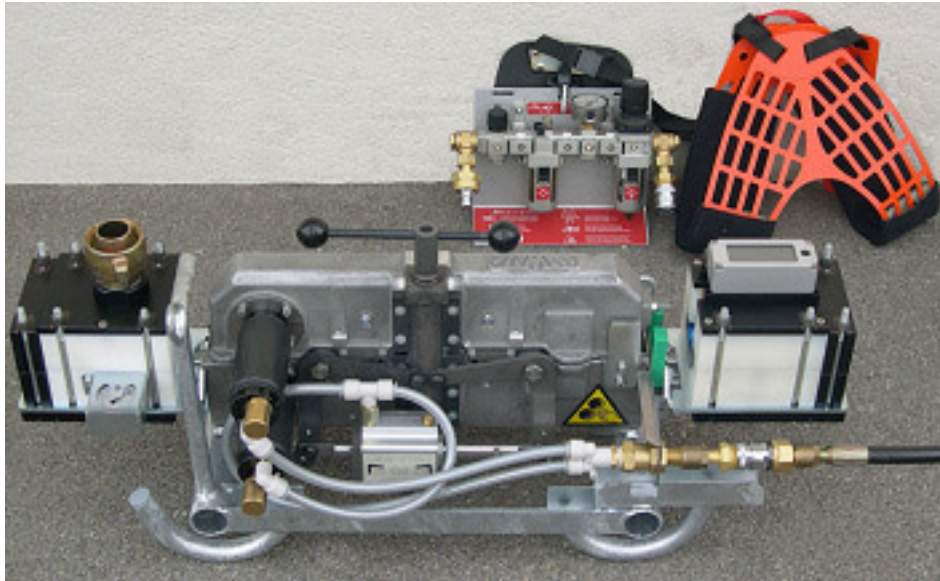

ADVANTAGES :

- ☑ easy use and safety for operators and cable
- ☑ reduced infrastructure costs
- ☑ possibility to place much longer cables over tortuous routes
- ☑ possibility to have an almost constant daily installation capacity whatever the complexity of the duct run

Type	Pushing force (N)	Max. speed (m/min.)	Recomm. speed (m/min)	Diameter of cable (mm)	Outer diameter of duct (mm)	Max. pressure (bar)	Dimension (mm)	Weight (kg)
SuperJet P	600	60	40	14-22	20-63	12	900x345x350	35

CHARACTERISTICS :

- operates as : PUSHER, PULLER and PNEUMATIC PUSH-PULL
- can also be used as an intermediate assist for cascading
- possibility to achieve long distances
- possibility to remove cables
- mono-directional


USEFUL ACCESSORIES




Aftercooler AHP 400



Figaro

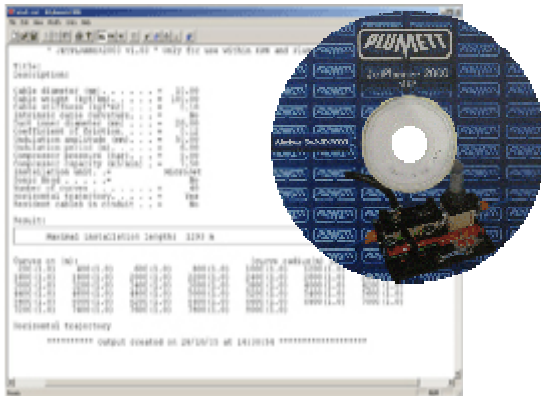

JetPlanner Program

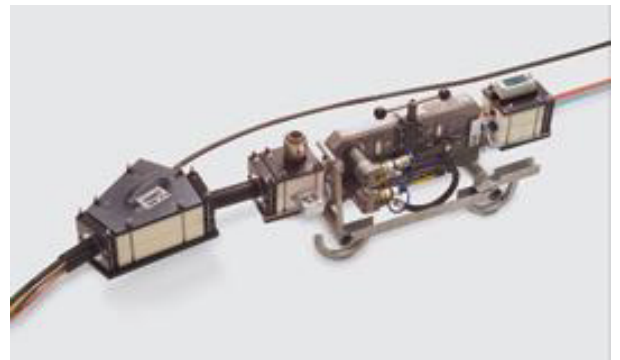

Y-connectors

- **Air Aftercooler AHP 400**, to improve "jetting" performance when ambient temperature exceeds 25°C. This accessory is strongly recommended for operation in warm climate areas
- **Figaro®**, an intermediate cable storage device replacing the cumbersome figure-eighting and saving work-force
- **Jetplanner**, "jetting" simulation software for installation job planning, suitable for PC
- **Y-Connector**, for placing a second or third cable in an already occupied duct, or install two cables simultaneously in one duct
- **Sonic Head**, a semi-open shuttle fitted to the end of the cable and exerting a pulling force equivalent to 10% of the load produced by an airtight shuttle, thus enhancing the "jetting" performance with sloppy type cables (very low stiffness)
- **Jetting Lube**, a duct lubricant improving "jetting" speed and distances
- **Duct Calibrating and Fault Localizing Device RKV**, an important tool improving daily production as restrictions in ducts can be identified prior to cable placement
- **"Floating" Kit**, permitting to "jet" cables with water
- **Bundle Jetting Kit "MD"**, permitting to "jet" several cables or sub-ducts (micro-tubes) simultaneously

Please refer to our Internet website for more information on these accessories